# lighthouse oak



Comfort Premium | CC1516

#### Reducer

WP1584\_00016RD

2.17 in.

0.708 in.

Used to transition between two flooring heights, providing a smooth change.

TRIM LENGTH (in.)

94.5

TRIM HEIGHT (in.)

0.69

TRIM WIDTH (in.)

2.17



#### T-Mold

WP1584\_00016TM



Covers the seam between two floors of equal height.

TRIM LENGTH (in.)

94.5

TRIM HEIGHT (in.)

0.59

TRIM WIDTH (in.)

1.71



### Quarter Round

WP1584\_00016QR

Installed along the base of the wall to cover gaps and add a decorative touch.

TRIM LENGTH (in.)

94.5

TRIM HEIGHT (in.)

0.708

TRIM WIDTH (in.)

0.708



4.49 in.

#### Threshold

WP1584\_00016BT



2.01 in.

Creates a smooth transition between rooms or doorways, often at entryways.

TRIM LENGTH (in.)

94.5

TRIM HEIGHT (in.)

0.69

TRIM WIDTH (in.)

1.73



### Flush Stair Nose

WP1584\_00016FS

Provides a clean, flush edge where the stair nose meets the floor.  $\,$ 

TRIM LENGTH (in.)

94.5

TRIM HEIGHT (in.)

1.57

TRIM WIDTH (in.)

4.49



## Overlap Stair Nose

WP1584\_00016OS

Covers the edge of the stair, overlapping the flooring of the step.

TRIM LENGTH (in.)

94.5

TRIM HEIGHT (in.)

1.5

TRIM WIDTH (in.)


2.01



# lighthouse oak



Comfort Premium | CC1516

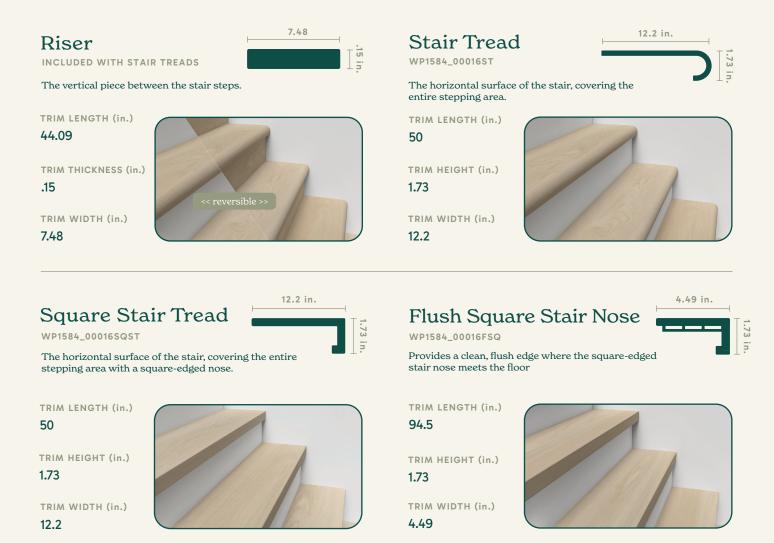

Stair Treads Tip: Complete the look on the top stair with a flush or overlap stair nose.